



WD Series

Innovative Product for Indoor Solution

**THINK
OUTSIDE
THE
BOX**






3 times intensity than steel material

CNC high precision with only $\pm 0.1\text{mm}$ tolerance. 3 times precision than steel material.



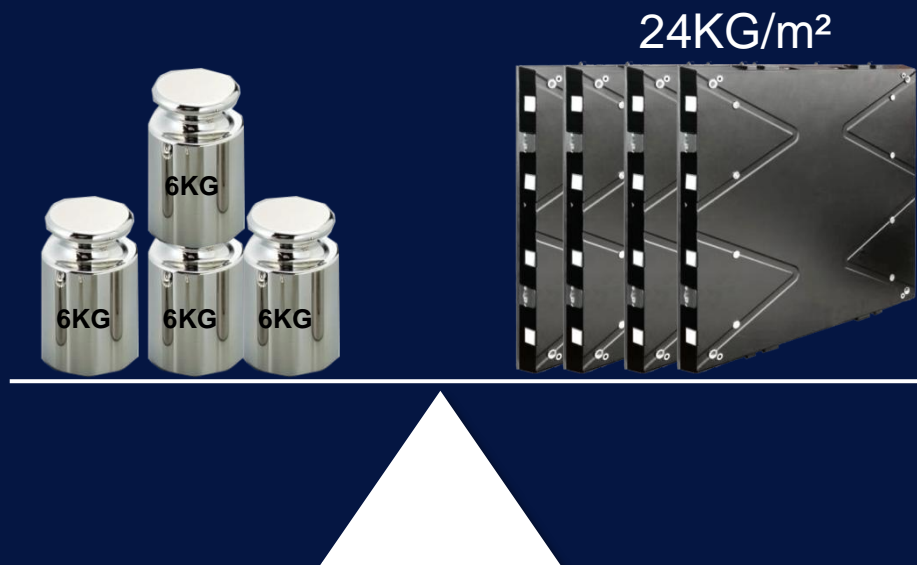

Super slim only 57mm
WD pro is only 41mm




57mm



Totally front installation
without any structure and
maintenance space
backside. Save structure
cost a lot.

Noiseless operation without
ventilator.

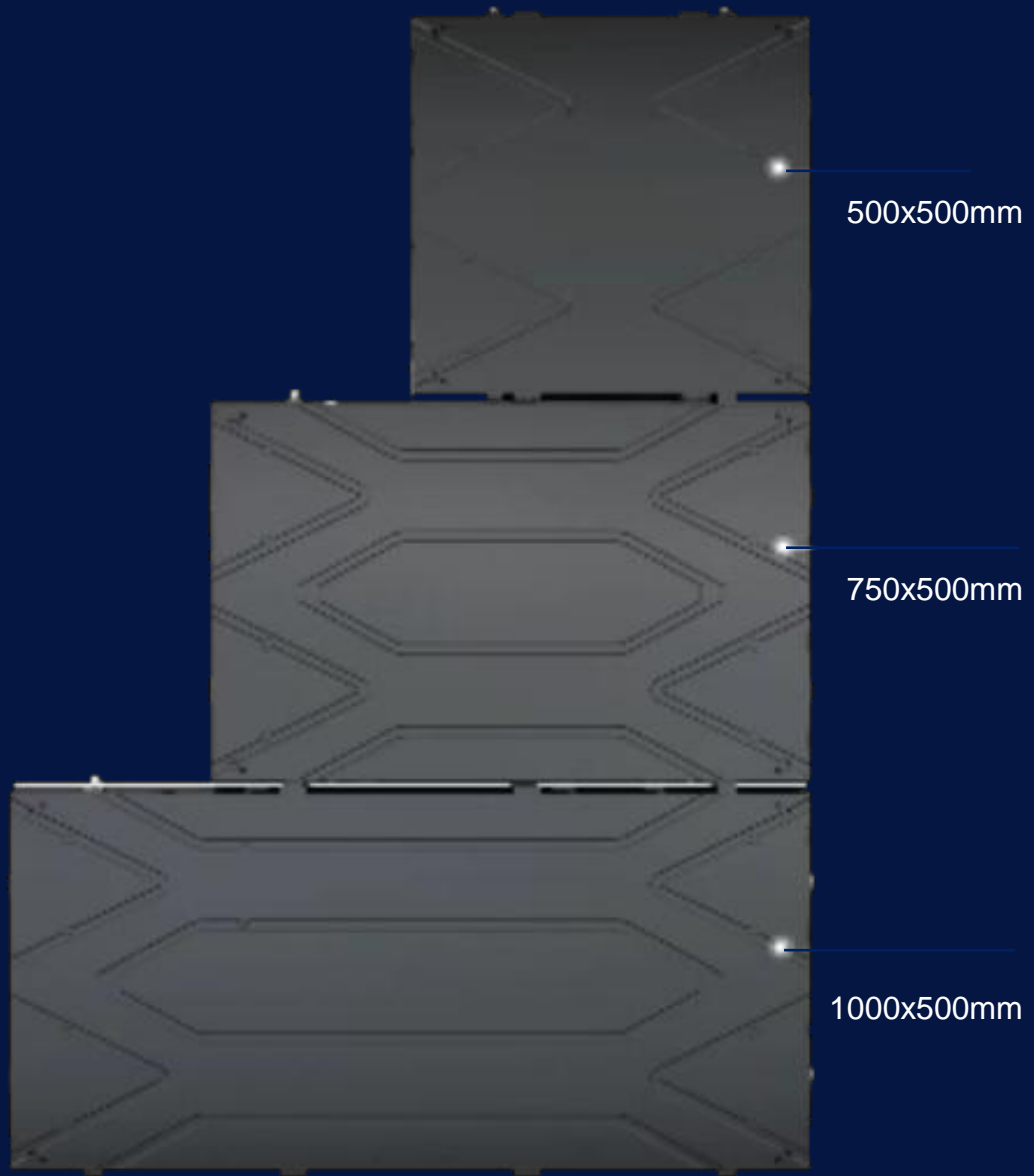



500x500mm

750x500mm


1000x500mm

Multiple size for mixture joint

P1.9 P2.5 P2.6 P2.9 P3.9
available

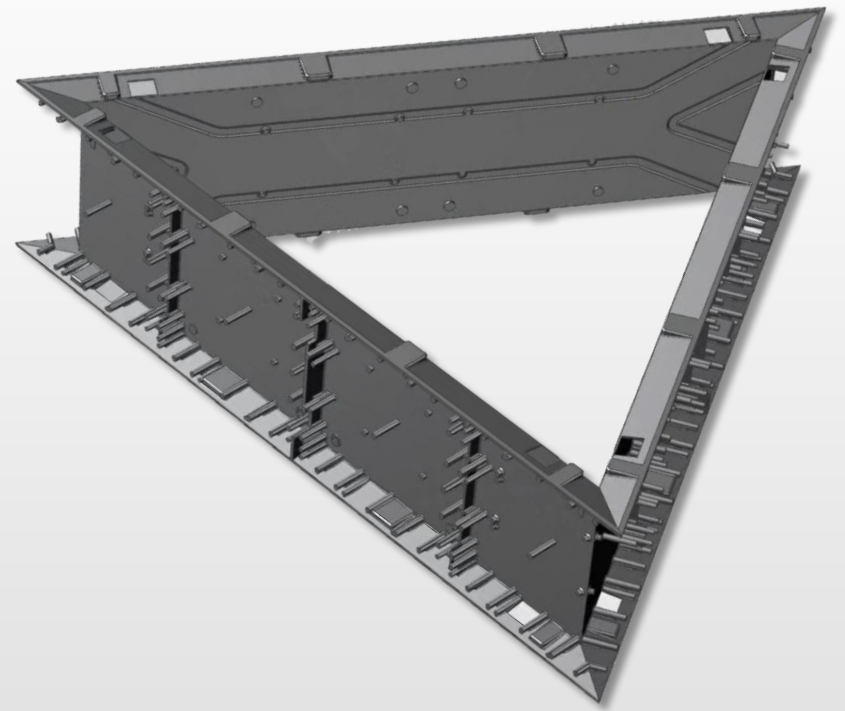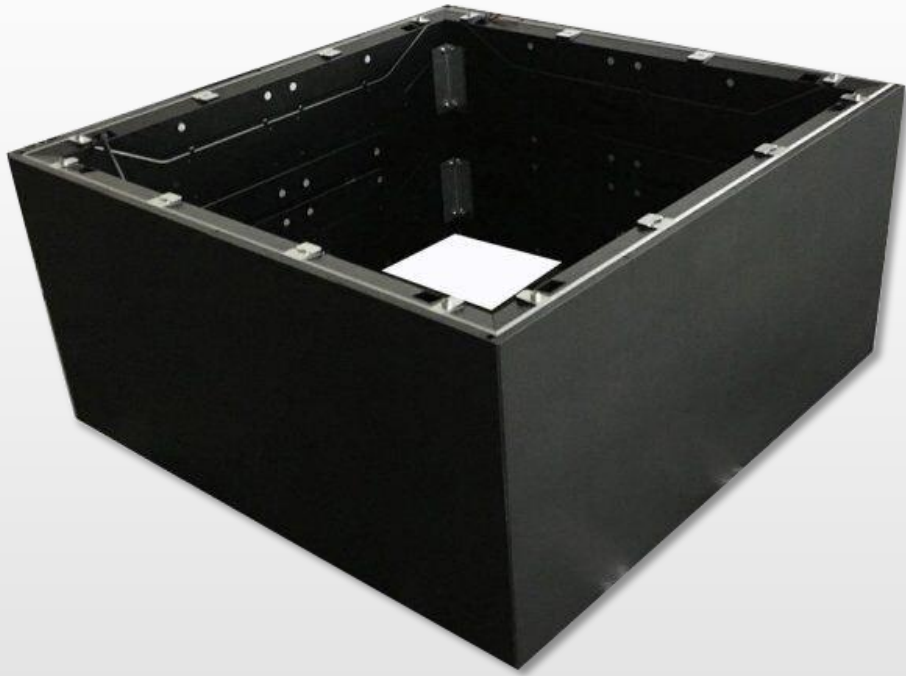


customizable creative angle

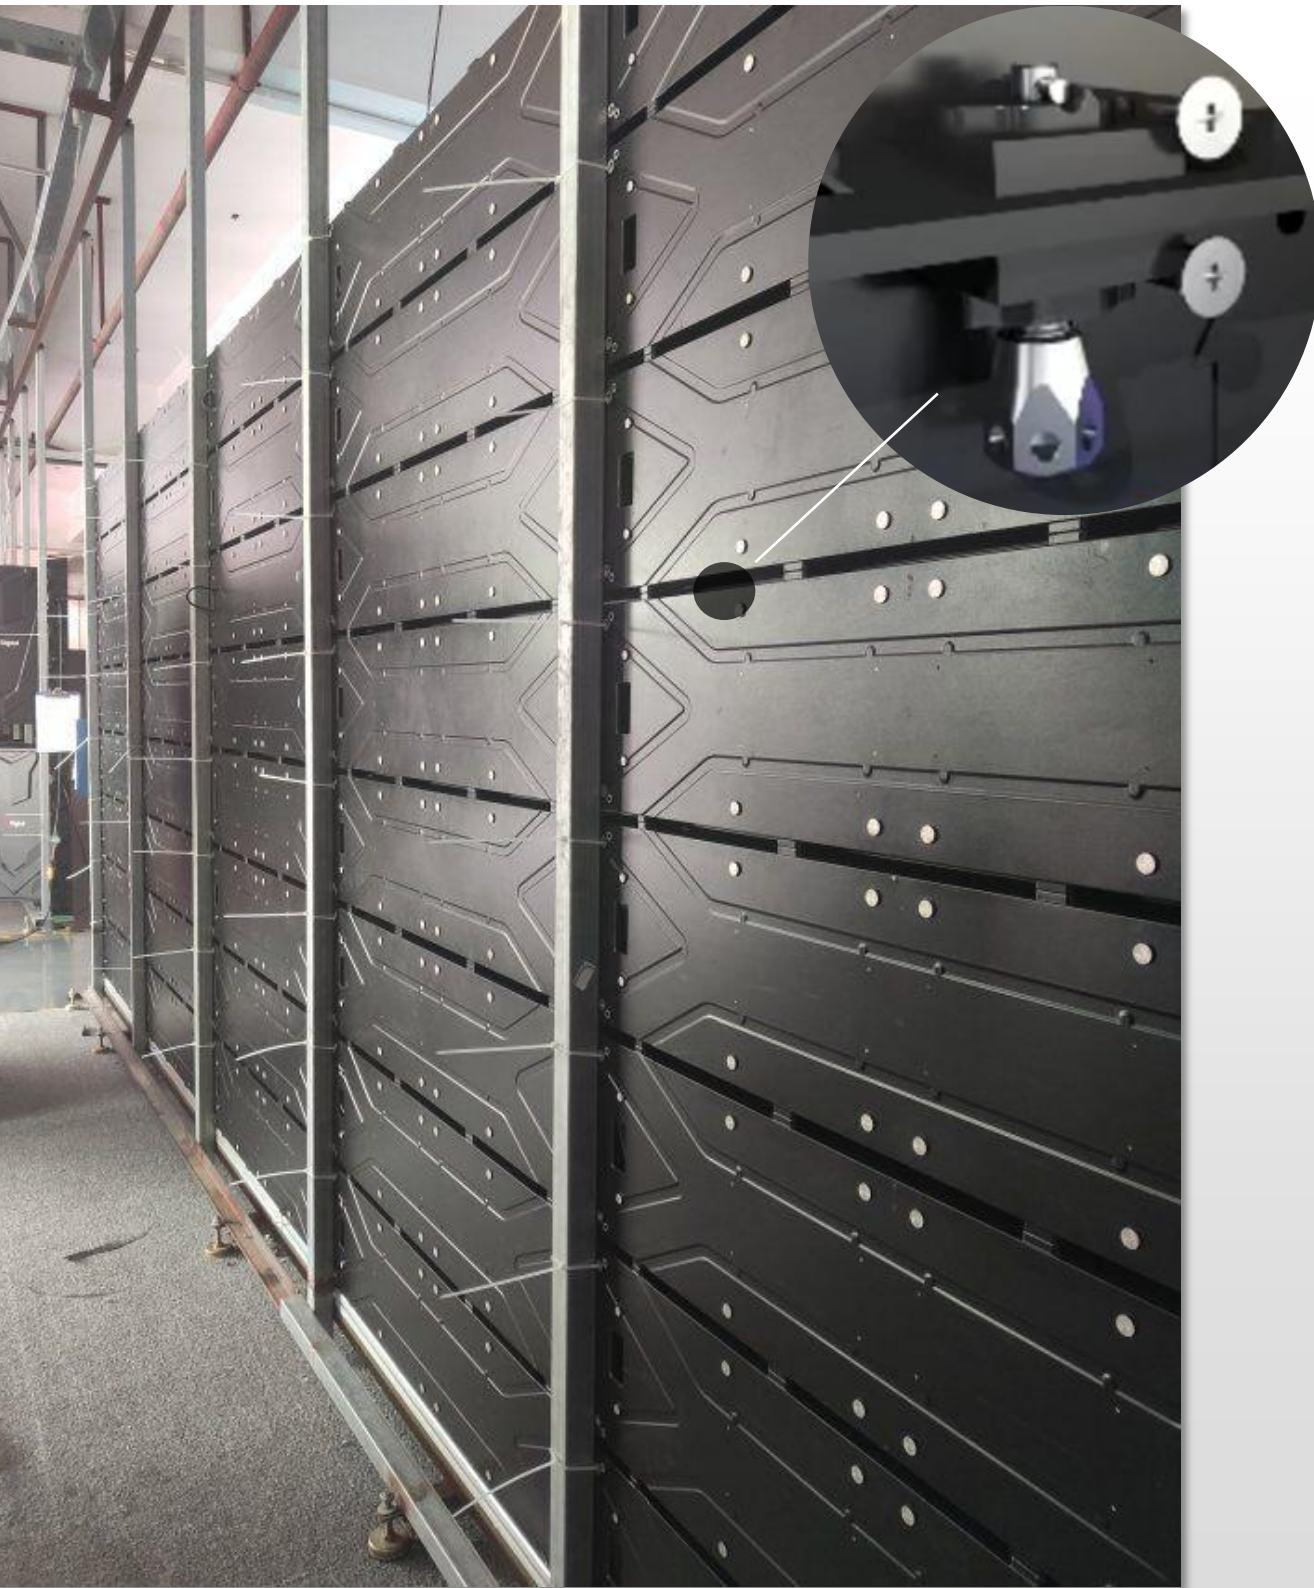


Cable free connection bewteen cabinets, nice looking backside.

4pcs intelligent lock for quick& convenient installation.

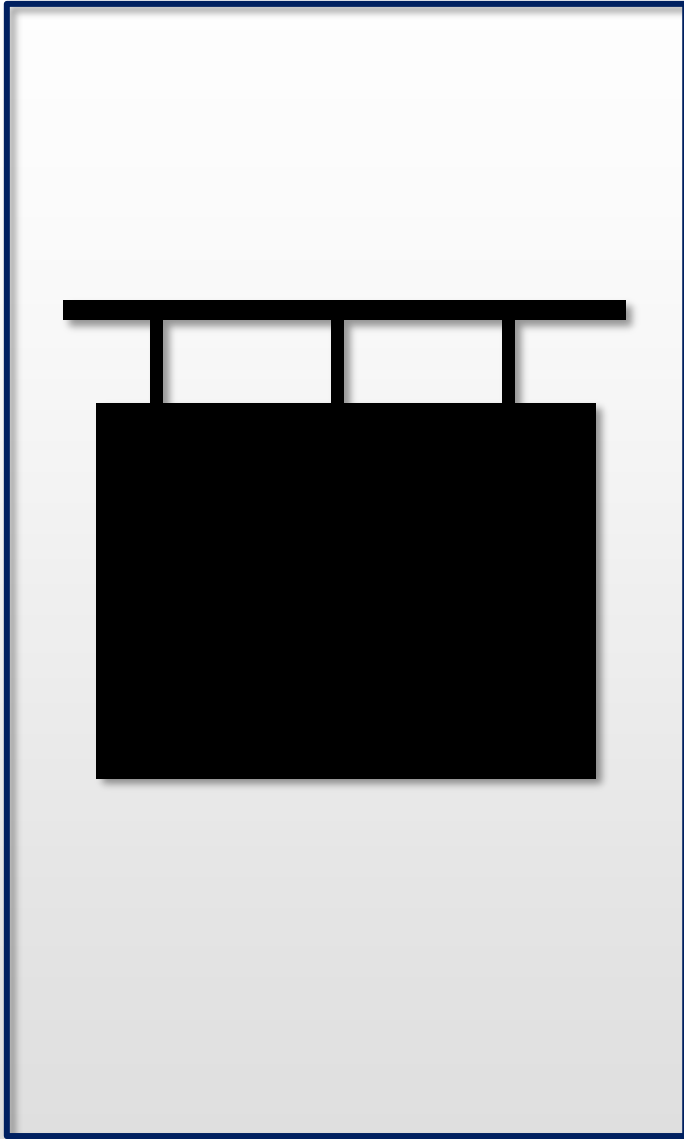

Hanging

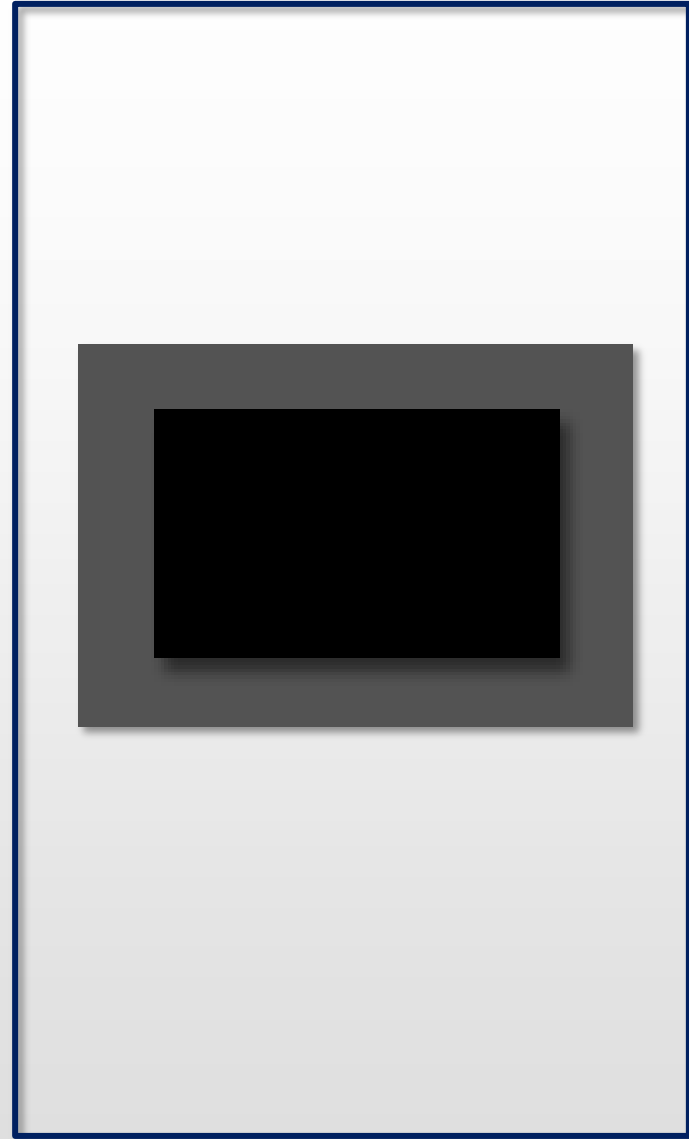

Wall-mounted



PROJECT GALLERIES

Specification for indoor models

Pixel pitch	2.6mm	
LED configuration	SMD2121	
Brightness	1000 nits	
Viewing angle	140°/ 140° (50% brightness)	
Scan mode	1/32	
Refresh rate	3840Hz	
Processing	16 bits	
Module size	250mm x 250mm (W x H)	9.84" x 9.84" (W x H)
Panel size	500mm x 500mm (W x H)	19.69" x 19.69" (W x H)
Panel weight	6kg	
Input voltage	AC100~240V 50/60 HZ	
Power consumption (Avg)	200W/sqm	
Power consumption (Max)	640W/sqm	
Working temperature	-20°C~60°C	
IP rating	IP31/IP31	
Life span	100,000 hrs	
Warranty	24 months	

Specification for indoor models

Pixel pitch	2.9mm	
LED configuration	SMD2121	
Brightness	1000 nits	
Viewing angle	140°/ 140° (50% brightness)	
Scan mode	1/28	
Refresh rate	3840Hz	
Processing	16 bits	
Module size	250mm x 250mm (W x H)	9.84" x 9.84" (W x H)
Panel size	500mm x 500mm (W x H)	19.69" x 19.69" (W x H)
Panel weight	6kg	
Input voltage	AC100~240V 50/60 HZ	
Power consumption (Avg)	200W/sqm	
Power consumption (Max)	650W/sqm	
Working temperature	-20°C~60°C	
IP rating	IP31/IP31	
Life span	100,000 hrs	
Warranty	24 months	

Specification for indoor models

Pixel pitch	3.91mm	
LED configuration	SMD2121	
Brightness	1000 nits	
Viewing angle	140°/ 140° (50% brightness)	
Scan mode	1/16	
Refresh rate	3840Hz	
Processing	16 bits	
Module size	250mm x 250mm (W x H)	9.84" x 9.84" (W x H)
Panel size	500mm x 500mm (W x H)	19.69" x 19.69" (W x H)
Panel weight	6kg	
Input voltage	AC100~240V 50/60 HZ	
Power consumption (Avg)	200W/sqm	
Power consumption (Max)	650W/sqm	
Working temperature	-20°C~60°C	
IP rating	IP31/IP31	
Life span	100,000 hrs	
Warranty	24 months	

Specification for indoor models

Pixel pitch	4.81mm	
LED configuration	SMD2121	
Brightness	1000 nits	
Viewing angle	140°/ 140° (50% brightness)	
Scan mode	1/13	
Refresh rate	3840Hz	
Processing	16 bits	
Module size	250mm x 250mm (W x H)	9.84" x 9.84" (W x H)
Panel size	500mm x 500mm (W x H)	19.69" x 19.69" (W x H)
Panel weight	6kg	
Input voltage	AC100~240V 50/60 HZ	
Power consumption (Avg)	200W/sqm	
Power consumption (Max)	650W/sqm	
Working temperature	-20°C~60°C	
IP rating	IP31/IP31	
Life span	100,000 hrs	
Warranty	24 months	