




SH Series


Small Pixel Pitch LED Display

**THINK
OUTSIDE
THE
BOX**




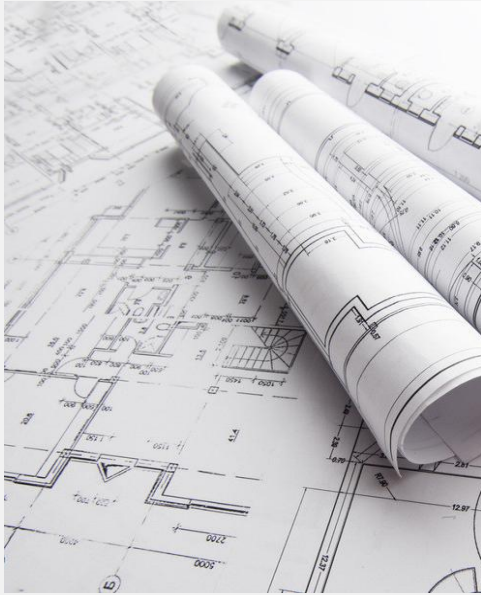

Design Idea

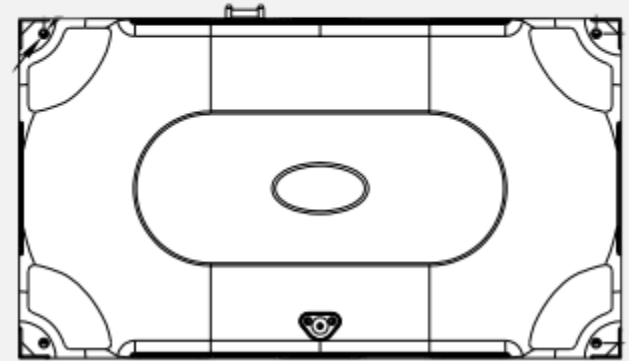

337.5mm

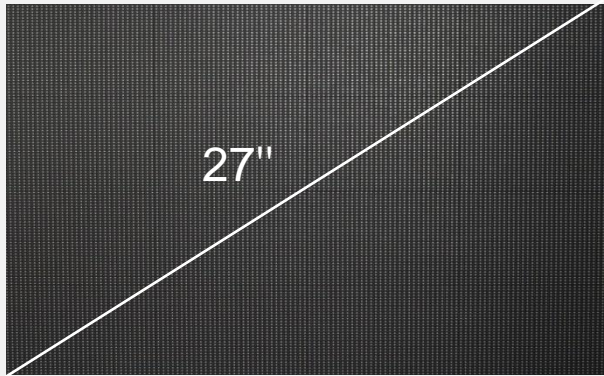



Weight: 5KG




38mm



600mm

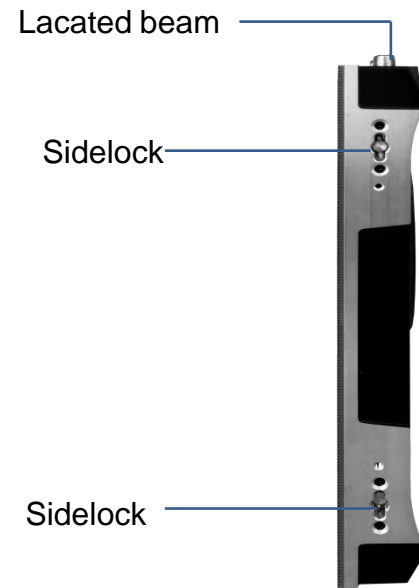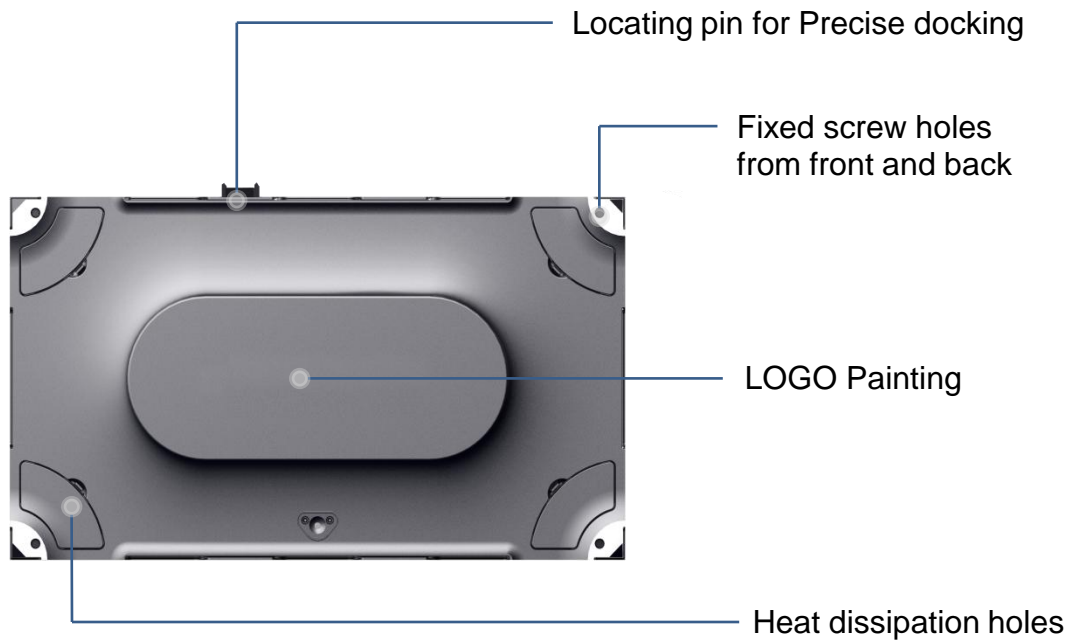

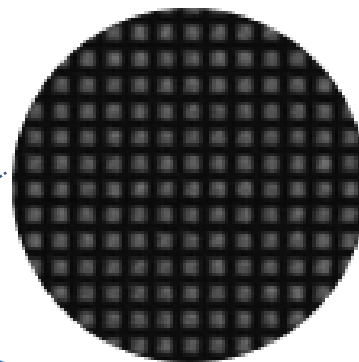


16:9 gold ratio

9000:1 contrast

Intelligent brightness, colors calibration


Noiseless design

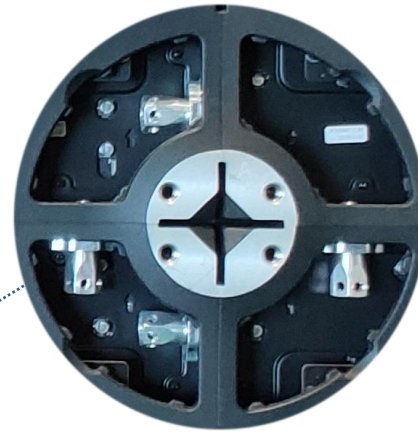

Cable free connection

Quick installation with cabinet lock

Seamless joint with 4pcs quick lock and locating pins.

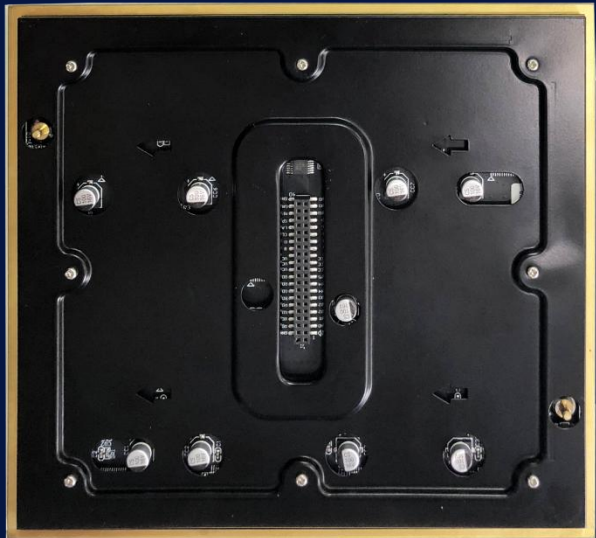

Led module with back cover to protect IC and avoid out of shape

Mini module design to well control spare module cost

P0.9 P1.2 P1.5 P1.8 P2.3 all is available



Wireless Connection The cable-free design

- Between the cabinets not only effectively reduces the failure rate but also extends the life of the screen, saving installation time and labour




Cabinet maintenance

- Die-casting Aluminum Material
- One person can install and maintain independently
- Front Maintenance
- Modules, power supply and internal cables can be replaced from the front side

Support 2K / 4K / 8K



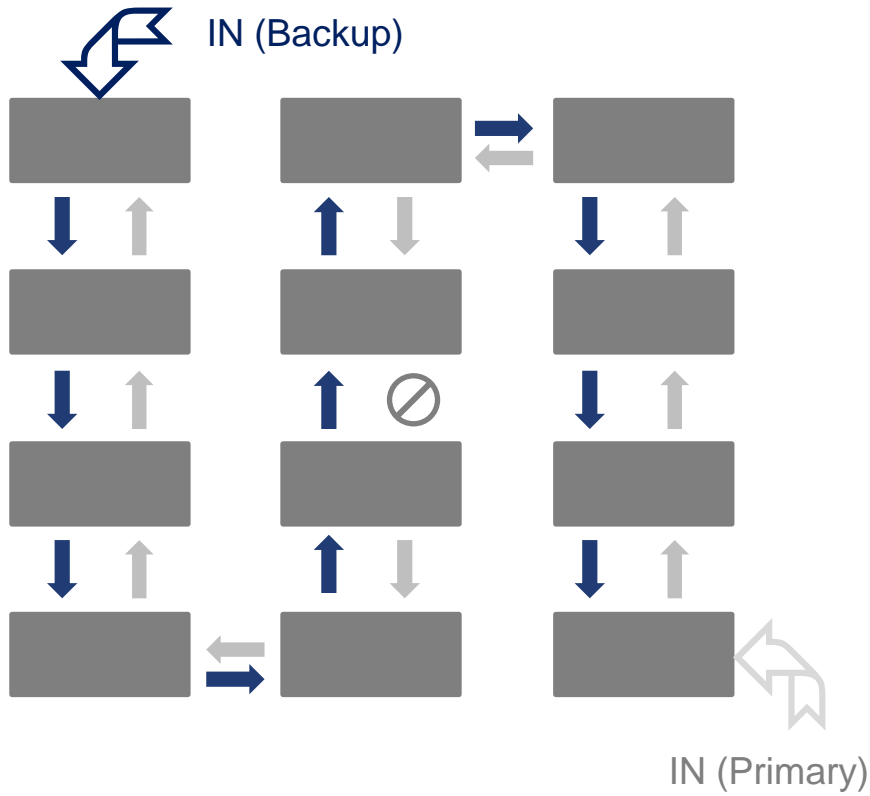


Dual Backup System
 Power supply, signal cable backup
 available




Customized for 90 degree




Available for inner curve

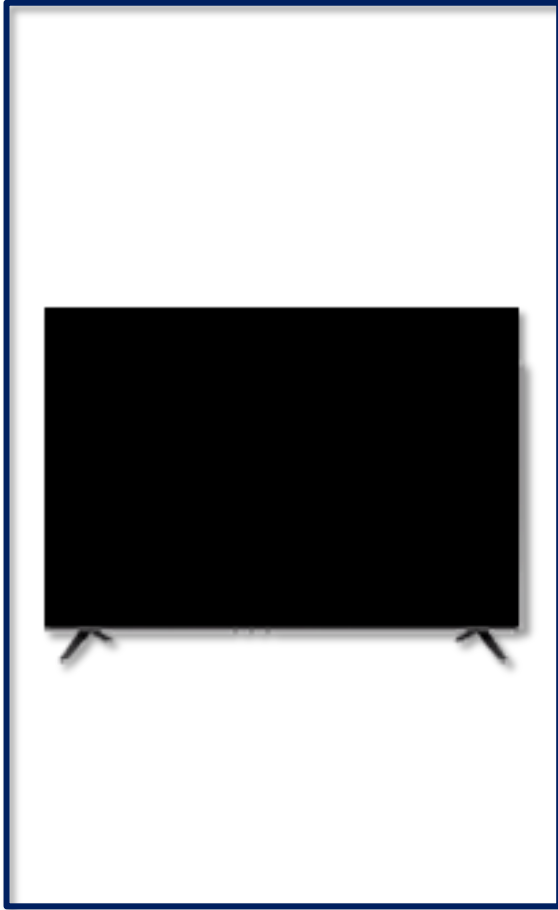

Freeding standing

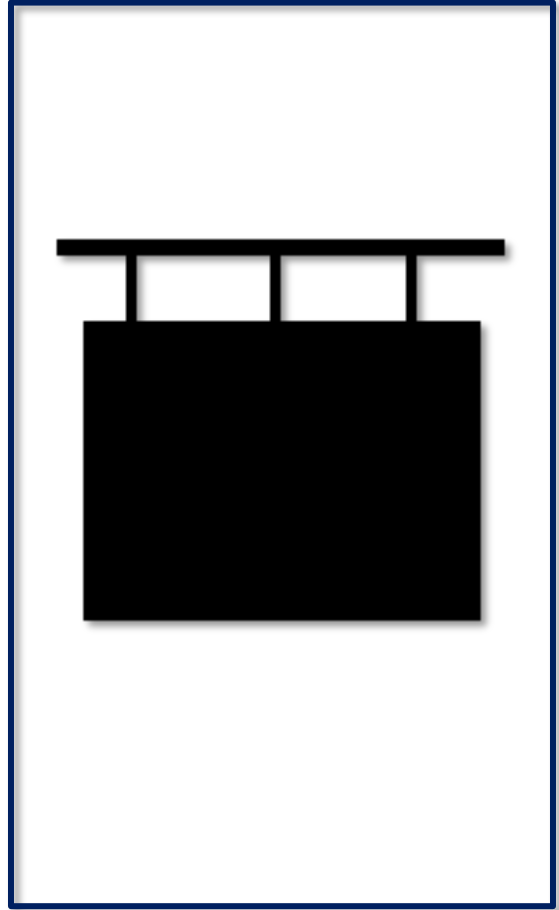

Hanging

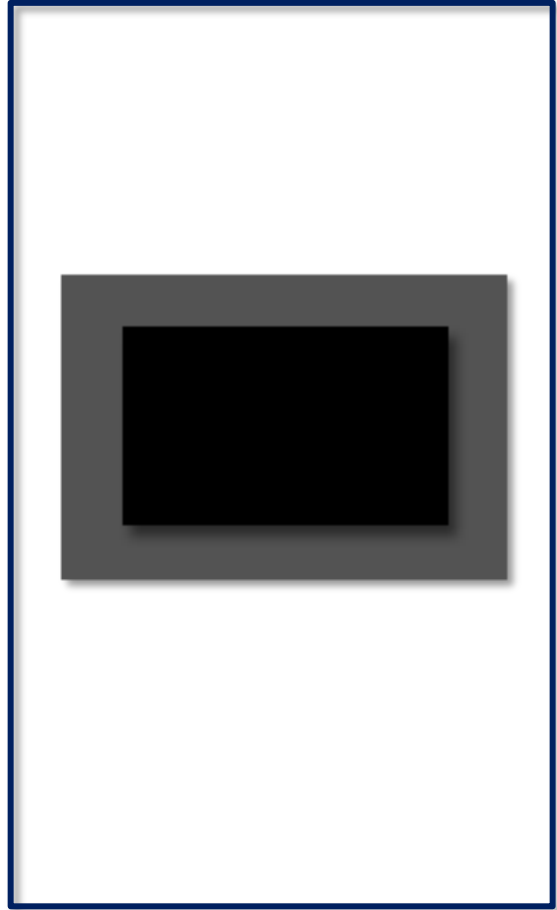

Wall-mounted



CCTV

Conference

ADVERTISING

Specification

Pixel pitch	1.25mm
LED configuration	SMD1010
Brightness	800nits
Viewing angle	160°/160 ° (H/V)
Scan mode	1/27
Refresh rate	3840Hz
Processing	16bits
Module size	150mm x168.75 mm x15 mm (W x H x D) 5.90" x6.64 " x 0.59" (W x H x D)
Cabinet size	600mm x 337.5mm x38 mm (W x H x D) 23.62"x13.28 " x 1.49" (W x H x D)
Cabinet weight	5kg / 11 lbs
Input voltage	AC100~240V 50/60 HZ
Power consumption (Avg)	225W/sqm
Power consumption (Max)	600W/sqm
Working temperature	-30°C~60°C
IP rating	IP31
Life span	100,000 hrs
Warranty	2 years

Specification

Pixel pitch	1.56mm
LED configuration	SMD1212
Brightness	800nits
Viewing angle	160°/160 ° (H/V)
Scan mode	1/27
Refresh rate	3840Hz
Processing	16bits
Module size	150mm x168.75 mm x15 mm (W x H x D) 5.90" x6.64 " x 0.59" (W x H x D)
Cabinet size	600mm x 337.5mm x38 mm (W x H x D) 23.62"x13.28 " x 1.49" (W x H x D)
Cabinet weight	5kg / 11 lbs
Input voltage	AC100~240V 50/60 HZ
Power consumption (Avg)	225W/sqm
Power consumption (Max)	600W/sqm
Working temperature	-30°C~60°C
IP rating	IP34
Life span	100,000 hrs
Warranty	2 years

Specification

Pixel pitch	1.87mm
LED configuration	SMD1515
Brightness	800nits
Viewing angle	160°/160 ° (H/V)
Scan mode	1/30
Refresh rate	3840Hz
Processing	16bits
Module size	150mm x168.75 mm x15 mm (W x H x D) 5.90" x6.64 " x 0.59" (W x H x D)
Cabinet size	600mm x 337.5mm x38 mm (W x H x D) 23.62"x13.28 " x 1.49" (W x H x D)
Cabinet weight	5kg / 11 lbs
Input voltage	AC100~240V 50/60 HZ
Power consumption (Avg)	225W/sqm
Power consumption (Max)	600W/sqm
Working temperature	-30°C~60°C
IP rating	IP34
Life span	100,000 hrs
Warranty	2 years